



# An Experimental Study of Fish Movement with Turbulent Kinetic Energy along the Pools of A Vertical Slot Fish Pass

M. N. Sirajee <sup>a++\*</sup>

<sup>a</sup> Department of Civil Engineering, European University of Bangladesh, Bangladesh.

## Author's contribution

*This work was carried out by a sole author, who designed the study, performed the statistical analysis, wrote the protocol, managed the analyses of the study, conducted the literature searches, and wrote the first draft of the manuscript. The same author read and approved the final manuscript.*

## Article Information

DOI: 10.9734/IJECC/2023/v13i92454

## Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/101330>

Original Research Article

Received: 17/05/2023

Accepted: 19/07/2023

Published: 27/07/2023

## ABSTRACT

Bangladesh is a land of river which is situated in the delta of the Ganges-Brahmaputra-Meghna (GBM) Rivers which are three of the largest rivers of the world. These rivers provide an arterial transportation network for fish movement. Fish migration depends on flow characteristic and surrounding flood plain connected to rivers. In recent time for flood control in monsoon and water storage in lean period a lot of structure has been built along and across the river [77]. As a result the natural sequence of flooding in floodplain of Bangladesh, food chain and life cycle of natural fish and other aquatic species has become under sever threat [64]. In this research an experimental approach has been carried out to understand the turbulence structures of the flow inside a laboratory flume with different local fish species. The structural set up consists of an adverse slope of 6% followed by a mild slope of 3.4%. The adverse slope is 2.54 m in length and the mild slope is

<sup>\*\*</sup> Assistant Professor;

<sup>\*</sup>Corresponding author: E-mail: [nawrose@eub.edu.bd](mailto:nawrose@eub.edu.bd);

4.45 m in length. Total nine sets of experiments have been conducted. For each set of experiments, data points were distributed on a 10 cm (in the longitudinal direction) x 10 cm (in the transverse direction) grid at 0.6 hydraulic depth and 10 cm (in the longitudinal direction) x 20 cm (in the transverse direction) grid at 0.4 and 0.8 hydraulic depth. In this experimental setup turbulent kinetic energy and fish movement in all four pools will be observed. This experimental study consists of three types of fish species; Rui (*Labeo rohita*), Catla (*Giberlion catla*) and Mrigel (*Cirrhinus mrigala*) of fry size (1-2 cm body length), fingerline size (7-10 cm) and juvenile size (10-20 cm) have been selected for studying. The flow from slot travels through the center of the pool to the next slot with two recirculation region on either side of the jet. At the pool opening the flow appear almost in the form of a shooting jet. There are similarities with turbulence characteristics in each case. Fishes have avoided high turbulent kinetic energy area in the contour map. The comparison shoes the area with low turbulent kinetic energy was most suitable for fishes to pass the pools or taking rest inside the pools. The results may be useful insight on the turbulence characteristics of flow in the vertical slot fish pass and can be used to study fishes characteristic and also for guidance in the design of fish pass in the future.

**Keywords:** Fish pass; turbulence; hydraulic structures; fish habitats; water flow.

## 1. INTRODUCTION

Fish migration upstream and downstream or in the floodplain depends on flow characteristics and surrounding flood plains connected to rivers. The floodplains in the monsoon play primary role of reproduction and increase the fish biomass in open water fishery system [1]. During floods fish migrates into the floodplain for feeding, grazing, growth and reproduction. Fishes return to the river from floodplain at the end of the flood [30]. The construction of embankments, sluice gates and weirs parallel to the river for monsoon flood results in an interruption of main river flow with floodplains [2,4-7]. On the other hand, construction of hydraulic structures such as dams, rubber dams and barrages across the river for storage purpose of water for lean period causes an interruption of flow across the river [39]. As a result the natural sequence of flooding in floodplains of Bangladesh and life cycle of natural fish and other aquatic species has become under sever threat [12-15,19,20]. It has become necessary to make an adjustment of the existing hydraulic structure, to enable the fish to pass upstream or downstream [9,10]. Otherwise the migratory fish have been found to be striking against the water current or swept away in flow [3]. Fish friendly structures are defined by as hydraulic structures which can facilitate upstream and downstream or in the floodplain migration of fish species in rivers where natural and man-made obstructions prevent a free migration [16,17,22-26]. If simply an open gap is left in the hydraulic structure for fish migration, the velocity of flow through such an opening will be too high. Therefore, even the strongest fish will not be able to travel through the structure [75,85-87].

Many vertical slot fishpasses, particularly of the more economical single slot versions, are used in Canada, U.S.A., Norway, Australia, France, Germany and many other countries. Several of the older ones were designed with salmonid criteria and, not surprisingly, produced rather poor results in passing non-salmonids [81]. Comprehensive hydraulic studies of various designs with single slots, most of them summarized by [48], have assisted in adapting this fishway type to meet the needs of a variety of species, particularly potamadromous species [8,56,77,79,88 and 93]. [91] Report on the use of a vertical slot fish-way by three native potamadromous species of the Murray River in Australia. The Torrumbarry fishway has a slope of 5.5%, instead of the more common 10% for salmonids, pools of 2.9 m long x 2.0 m wide, and slot widths of 300 mm. The three species and corresponding maximum standard lengths for those fish which moved through the fishway were: bony herring (*Nematalosa erebi*) (Clupeidae)  $\leq 260$  mm, silver perch (*Bidyanus bidyanus*) (Terapontidae)  $\leq 320$  mm and golden perch (*Macquaria ambigua*) (Percichthyidae)  $\leq 520$  mm. It was found that for lengths of  $\geq 120$  mm, ascent rates related primarily to species behaviour, not fish size.

Fisheries sector requires urgent attention to tackle the challenges occurred from unplanned flood control structures [28,29,34]. Capture fishing on the floodplains and the haor basins, a traditional activity of the poor, is declining rapidly and will disappear altogether unless proper measures are taken. Due to interruption in the natural sequence of flooding in floodplain of Bangladesh, food chain and life cycle of natural fish and other aquatic species have become

vulnerable [64]. The impact on fish migration for flood control embankment and regulator appears to be of major concern to the perpetual survival of the natural fish stocks utilizing rivers and floodplain in many parts of Bangladesh [31,32,33 and 27].

The water regulatory structures like barrage, rubber dam, sluice gate and weirs causing river fragmentation and plays a major role in declining the freshwater fisheries [59 and 21]. The fish that complete their migrations within the river system are mostly affected by structural arrangements [63 and 69]. If no adjustment is made in the hydraulic structure, to enable the fish to pass upstream or downstream, then such migratory fish have been found to be striking against the water current or swept away in flow [40-42]. Non-provision of an arrangement for fish to pass upstream or downstream, may thus lead to large scale destruction of fish life [36-38]. If simply an open gap is left in the hydraulic structure for fish migration, the velocity of flow through such an opening will be very high. Therefore, even the strongest fish will not be able to travel through the structure [35].

A fish pass is a fish friendly structure that enables fish to overcome obstructions in the passage to the spawning grounds and other upstream or downstream migrations and is built when it is required for ecological, economical or legal considerations [44-46]. Also this can provide an area in the-pool where fish might be able to rest to gain energy to pass the next obstacle. Most commonly used fish pass in the world can be four types namely: pool and weir, Denil, vertical slot and culvert fish passes [11,18 and 47].

Fish passages typically consist of a series of stepped pools, ramps, or other mechanisms that assist fish in navigating around obstacles. They provide a pathway for fish to move upstream or downstream, mimicking natural river conditions to the extent possible [52-55]. By restoring connectivity and providing fish with access to previously inaccessible areas, fish passages play a crucial role in mitigating the impact of hydraulic structures on fish populations and restoring their natural migration patterns [65-68]. The implementation of fish passages requires careful planning and engineering to ensure their effectiveness and minimize potential negative impacts on fish and other aquatic species [49,50,60-62]. Ongoing monitoring and evaluation are also important to assess the success of fish passage projects and make any

necessary adjustments to improve their functionality [92,94]. Overall, fish passages are an essential tool in the restoration and conservation of river ecosystems, helping to maintain healthy fish populations and preserve the biodiversity and ecological balance of rivers impacted by hydraulic structures [89,90].

The concept of fish pass was introduced in Bangladesh in the 1990s and since then four Fish Friendly Structure (FFS) and fishpass have been built. These are: i) Kashimpur fishpass in Kushiya River in Maulvibazar District, ii) Sariakandi fishpass in Jamuna River in Bogra District, iii) Jugini fish friendly regulator in Lohajong River in Tangail District, and iv) Morichardana fish friendly regulator in Jamalpur District. Among them Sariakandi fishpass and Kashimpur fishpass were designed as a vertical slot fishpass. A vertical slot fishpass consists of a rectangular channel with a sloping or stepped floor, which is divided into a number of pools of regular lengths. The main advantages of vertical slot fishpass are: i) tolerate reasonably large water level difference between upstream and downstream ends [18]; ii) flow patterns inside the pools and water velocities in the slots are almost independent on the water depth in the fishpass [57]; and iii) provides an area in the-pool where fish can take rest to gain energy to pass the next obstacle [43,77 and 78]. From the literature review studies it has been found very few experimental work based on local fish species has been conduct out in vertical slot fishpass. Based on the above discussion an experimental study on vertical slot fishpass with local fish species will be carried out.

## 2. EXPERIMENTAL ARRANGEMENT AND EXPERIMENTS

The experiment has been performed in a 70 feet (21.34 m) long, 2.5 feet (0.762 m) wide and 2.5 feet (0.762 m) deep rectangular tilting flume. The side walls of the flume are made of clear glass and they are vertical. The water resistant color has been used to pain the flume bed to avoid the development of any unnecessary bed friction. In the upstream and downstream end of the flume two wire mesh screens were placed to stop the fish to go inside the pumps and reservoir of the flume. An adverse slope of 1:16.67 was placed at the upstream portion and a mild slope of 1: 29.17 was placed at the downstream portion of the physical model. The entire model structure including the sloping portion was painted with protective coating to prevent the decomposing of wood from the effect of hydraulic flow.

Flume bed has been maintained as horizontal and it is supported on an elevated steel truss system. Two pumps were used to supply the head tank from the laboratory sump and the discharges were measured by means of magnetic flow meters located in the supply lines. Necessary steps were taken to prevent any unnecessary damage in the flume structure while conducting the experiment.

The structural design that has been applied in this study is the design 1 [77] which is widely used for designing vertical slot fish pass all over the world. The physical model of the structure was developed as a vertical slot fish pass. The structural set up consists of an adverse slope of 6% followed by a mild slope of 3.4%. The adverse slope is 2.54 m in length and the mild slope is 4.45 m in length. The fish pass is constructed on the mild slope which contains four pools. Each of the pool is approximately 1 m long, 0.762 m wide and 0.60 m high. The width of the opening of each pool was 0.127 m. Each component of the overall structure was built with wooden sheets. Schematic diagram of the physical model set up is shown Fig. 1 and Fig. 2.

A down-facing acoustic Doppler velocimeter (ADV) was used to investigate the velocity field.

The SonTek 10-MHz ADV (Acoustic Doppler Velocimeter) is a versatile, high-precision instrument used to measure 3D water velocity. The ADV is designed to record instantaneous velocity components at a single-point with a relatively high frequency. ADV has become a useful instrument in point wise measurement of 3D velocity fields in laboratory and field environments by recording the Doppler shift produced by acoustic targets in the flow [51,58] and [82]. Velocities are measured in a sampling volume located 5 cm away from the probe head. The probe head is made up of a single transmitter located in the center of the probe head and either two or three receivers mounted on arms. The transmitter generates a narrow beam of sound that is projected through the water. Reflections from particles or "scatterers" (such as suspended sediment, biological matter, or bubbles) in the water are reflected and sampled by the highly sensitivity receivers. The intersection of the receiver axes designates the location of the sampling volume. Son Tek ADV specifications state that the shape of the sampling volume is a cylinder of diameter of 0.6 cm and height of 0.9 cm. Data has been acquired at a sampling rate of 50 Hz. It can measure flow velocities from about 1 mm/s to 2.5 m/s with an accuracy of  $\pm 1\%$  of the measurement range [83].

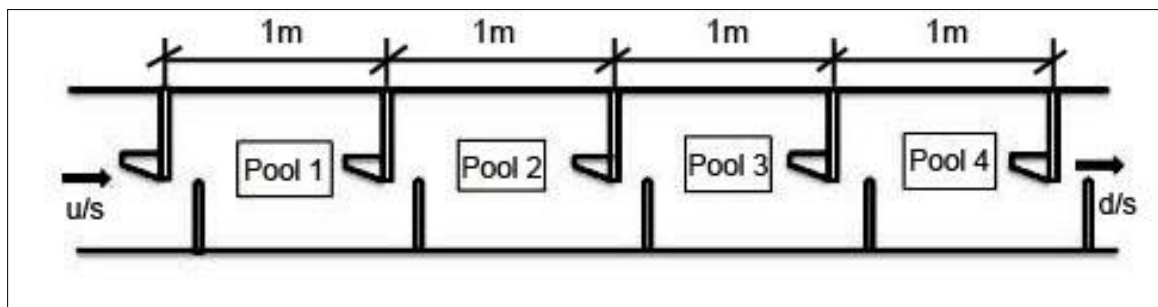


Fig. 1. Plane view of the schematic diagram of the physical model


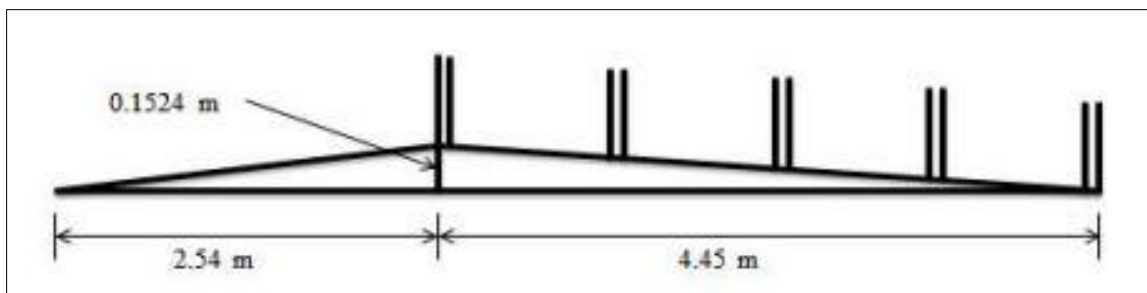


Fig. 2. Side view of the schematic diagram of the physical model

**Table 1. Specifications for experiment runs**

Experiment Run No.	1	2	3	4	5	6	7	8	9
Discharge, Q (m <sup>3</sup> /hr)	96	65	37	118	81	55	145	100	70
U/s Water Level (cm)	40	40	40	50	50	50	60	60	60
Total Head Loss, Δh (cm)	19.17	6	1	19.5	6	1.75	15.75	5.75	2

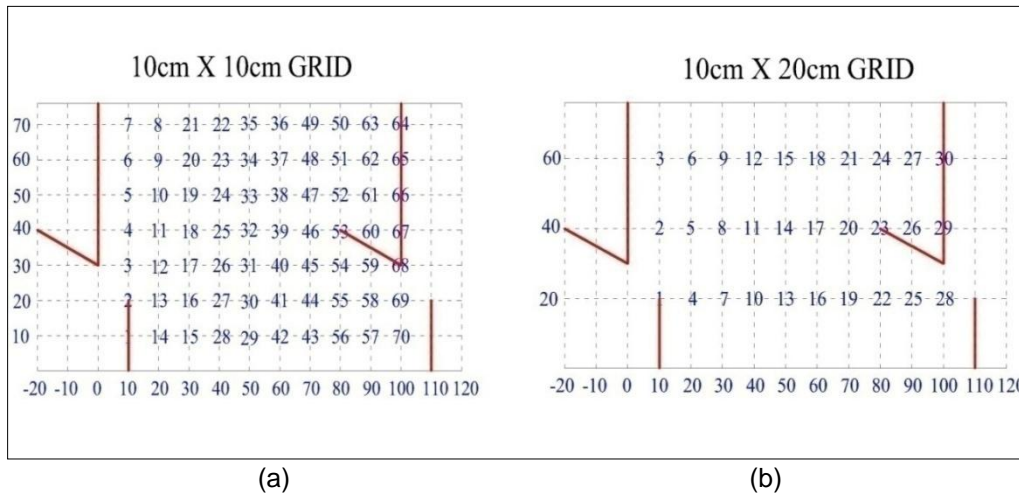

**Fig. 3. Data points distribution (a) 10 cm (in the longitudinal direction) x 10 cm (in the transverse direction) (b) 10 cm (in the longitudinal direction) x 20 cm (in the transverse direction)**

Total 9 sets of experiments have been conducted. Specifications of the experiment sets are shown in Table 1. For each set of experiments, data points were distributed on a 10 cm (in the longitudinal direction) x10 cm (in the transverse direction) grid at 0.6 hydraulic depth and 10 cm (in the longitudinal direction) x20 cm (in the transverse direction) grid at 0.4 and 0.8 hydraulic depth as shown in Fig. 3. Since ADV measures velocity in a sampling volume located 5 cm away from the probe head, measurement at 0.2 hydraulic depth is very difficult. It has been found that the flow pattern and the head drop per pool remain almost same in most of the pools [93]. Again measurements have been carried out in all the four pools for the critical and good conditions to obtain the velocity fields and contours.

### 3. RESULTS AND DISCUSSION

Turbulence strength has been calculated from:  
 $T_x = \sqrt{(u')^2}$ ;  $T_y = \sqrt{(v')^2}$  and  $T_z = \sqrt{(w')^2}$   
 respectively. Where  $u'$ ,  $v'$  and  $w'$  are the

fluctuating components of velocities [cm/s] in the down-stream, cross-stream, and vertical directions respectively; an overbar is used to denote a time average. In theory, the velocity record is continuous, and the mean can be evaluated through integration. Three-dimensional velocity measurements showed the isotropic turbulence strength in the (x, y) plane with and the non-isotropic turbulence strength in the (x, z) plane. While turbulence is generated by the shear, stronger shear appears at the channel bed. This is evident in profiles of turbulence strength within a boundary layer, as shown figure is greater. Turbulence distribution changed in the vicinity of the pool entrance. It increased the closer to the middle of the pool, forming a profile similar to turbulent velocity measured across a jet [71,72 and 84]. The mainstream continues through the center of the pool to the next slot while one recirculation regions of higher turbulent are created on either side of the mainstream. And these recirculation regions with low turbulent provide resting places for fish.

Total 9 sets of experiments have been conducted. Among them, comparison between two experimental runs; run 6 (Lowest discharge,  $Q = 55 \text{ m}^3/\text{hr}$ ) and run 7 (Highest discharge,  $Q = 145 \text{ m}^3/\text{hr}$ ) have been represented here.

### 3.1 Results from Experiment Run 6

The distribution of the turbulent kinetic energy contour at 0.4, 0.6 and 0.8 hydraulic depths for experiment run 6 in all 4 pools have been shown in Figs. 4, 5 and 6 respectively. From the velocity contour map analysis it is found that in most of the case maximum magnitude of turbulent kinetic energy occurs in between pools with two circulation pattern. In this figures the high turbulent kinetic energy is represented by red color which is ranged between 140 to 210  $\text{cm}^2/\text{s}^2$ .

The low turbulent kinetic energy zone is represented by blue color ranged 0 to 70  $\text{cm}^2/\text{s}^2$ . These low velocity zones represents the resting place of fish to gain energy before entering the high velocity zone or crossing the pools. Table 2 shows Maximum Turbulent Kinetic Energy ( $\text{cm}^2/\text{s}^2$ ) at 0.4, 0.6 and 0.8 hydraulic depths for experiment run 6 in all 4 pools. Where maximum turbulent kinetic energy occurs at 0.8H at pool 3.

In natural settings, fish are subject to the influence of a complex water environment that impacts their movement behavior. The local velocity field plays a crucial role in shaping fish movement patterns. The alteration in fish movement orientation could serve as a mechanism to enhance the effectiveness and efficiency of fish locomotion.

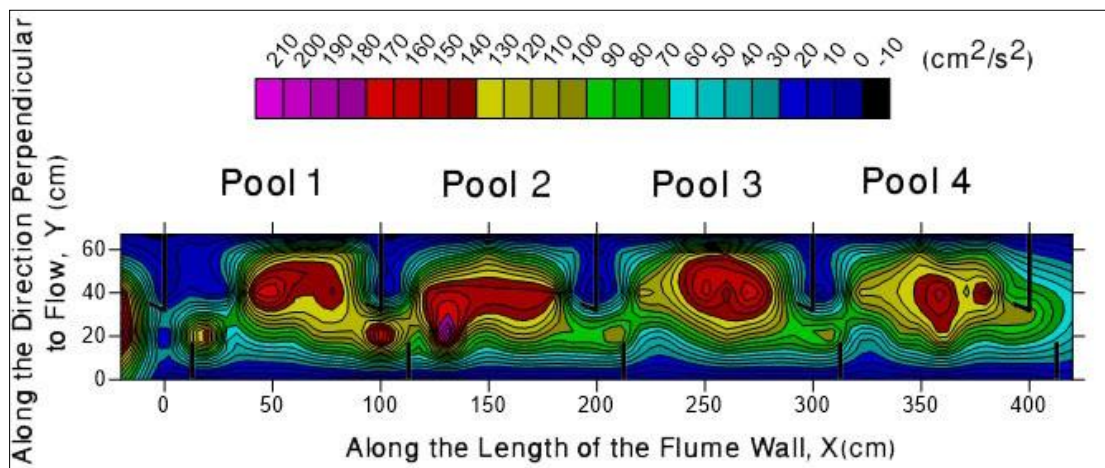


Fig. 4. Turbulent Kinetic Energy contour map at 0.4 hydraulic depth in all 4 pools for experiment run 6

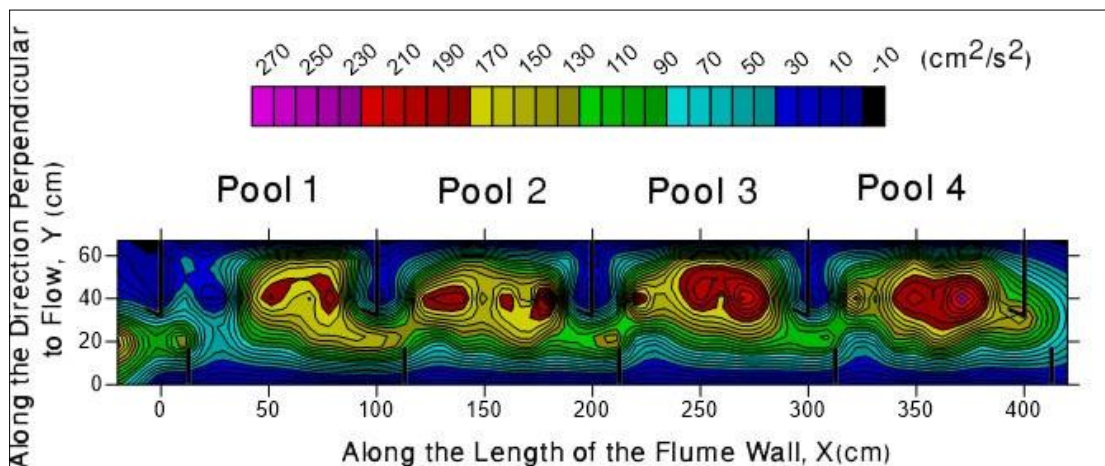


Fig. 5. Turbulent Kinetic Energy contour map at 0.6 hydraulic depth in all 4 pools for experiment run 6

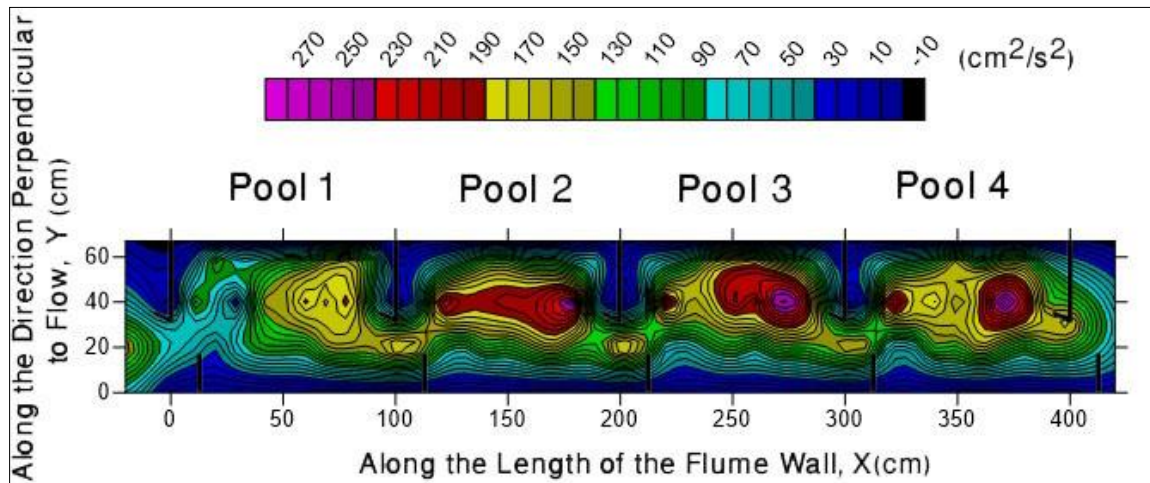


Fig. 6. Turbulent kinetic energy contour map at 0.8 hydraulic depth in all 4 pools for experiment run 6

Table 2. Maximum Turbulent Kinetic Energy ( $\text{cm}^2/\text{s}^2$ ) at a depth of 0.4H, 0.6H and 0.8H in all 4 pools for experiment run 6

Pool	Hydraulic Depth	Maximum Turbulent Kinetic Energy ( $\text{cm}^2/\text{s}^2$ )
Pool 1	0.4 H	182.598
	0.6 H	161.548
	0.8 H	166.958
Pool 2	0.4 H	163.02
	0.6 H	177.842
	0.8 H	174.658
Pool 3	0.4 H	185.82
	0.6 H	188.247
	0.8 H	194.754
Pool 4	0.4 H	170.658
	0.6 H	177.956
	0.8 H	184.956



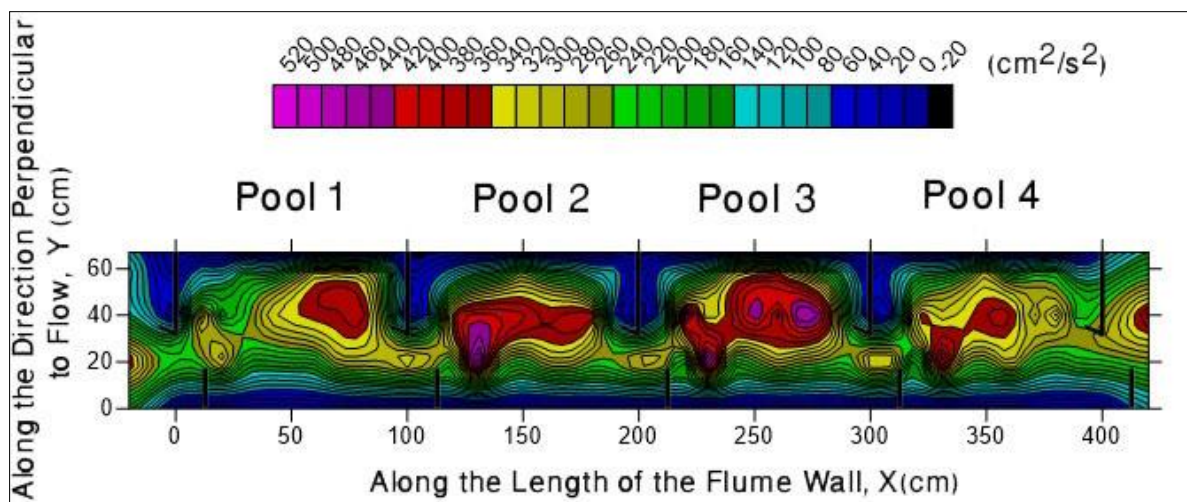


Fig. 7. Turbulent Kinetic Energy contour map at 0.4 hydraulic depth in all 4 pools for experiment run 7

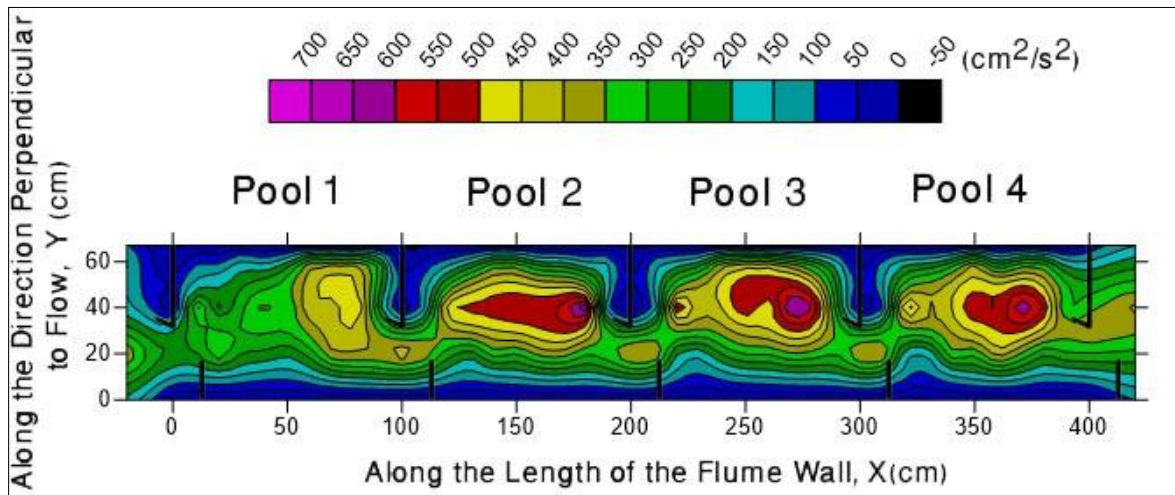

**Fig. 8. Turbulent Kinetic Energy contour map at 0.6 hydraulic depth in all 4 pools for experiment run 7**

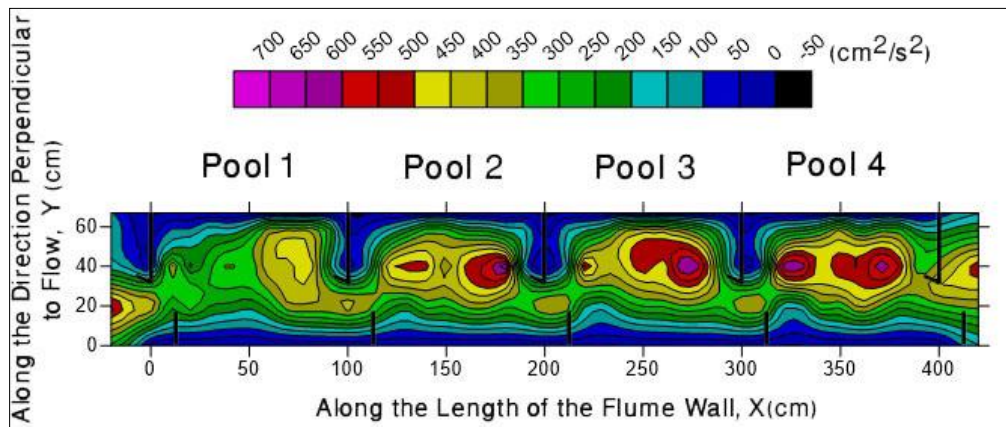

**Fig. 9. Turbulent kinetic energy contour map at 0.8 hydraulic depth in all 4 pools for experiment run 7**

**Table 3. Maximum turbulent kinetic energy ( $\text{cm}^2/\text{s}^2$ ) at a depth of 0.4H, 0.6H and 0.8H in all 4 pools for experiment run 7**

Pool	Hydraulic Depth	Maximum Turbulent Kinetic Energy ( $\text{cm}^2/\text{s}^2$ )
Pool 1	0.4 H	402.487
	0.6 H	406.986
	0.8 H	422.658
Pool 2	0.4 H	564.451
	0.6 H	550.148
	0.8 H	562.478
Pool 3	0.4 H	499.968
	0.6 H	513.486
	0.8 H	477.628
Pool 4	0.4 H	501.689
	0.6 H	488.587
	0.8 H	481.293



### 3.2 Results from Experiment Run 7

The distribution of the turbulent kinetic energy contour at 0.4, 0.6 and 0.8 hydraulic depths for experiment run 7 in all 4 pools have been shown in Figs. 7, 8 and 9 respectively. From the velocity contour map analysis it is found that in most of the case maximum magnitude of turbulent kinetic energy occurs in between pools with two circulation pattern. In this figures the high turbulent kinetic energy is represented by red color which is ranged between 360 to 520  $\text{cm}^2/\text{s}^2$ . The low turbulent kinetic energy zone is represented by blue color ranged 0 to 160  $\text{cm}^2/\text{s}^2$ . These low velocity zones represents the resting place of fish to gain energy before entering the high velocity zone or crossing the pools. Table 3 shows Maximum Turbulent Kinetic Energy ( $\text{cm}^2/\text{s}^2$ ) at 0.4, 0.6 and 0.8 hydraulic depths for experiment run 7 in all 4 pools. Where maximum turbulent kinetic energy occurs at 0.4H at pool 2.


### 4. FISH SWIMMING AND RESTING BEHAVIOR IN FISHPASS

1. Fishes have survived hundred percent in this fishpass, no mortality or fish injury occurred due to high turbulence.
2. The contour map of turbulent kinetic energy at different hydraulic depth in all 4 pools for experimental runs 1 have been observed from Fig. 4 to Fig. 6. Comparing the figures of all contour map of turbulent kinetic energy with Fig. 7: fish movement and resting patten in the pools for different turbulence condition, it can be said fishes have avoided high turbulent kinetic energy area (red) in the contour map. The comparison shoes the area with low turbulent kinetic energy (blue) was most suitable for fishes to pass the pools or taking rest inside the pools.
3. They could enter into the fish pass opening with water flow and reached up to downstream without any injury.


### 4.1 Group Swimming Behavior of Fishes

Migration of fishes typically occurs by group movements (Figs. 8 and 9). In this experiment, the number of major fishes migrating together tended to increase water velocity, forming groups. When they came to enter of fish passage (pool 1), the give the tail in front and passing with the water current. And when they enter from downstream (pool 4) they give the mouth or face to the chamber, and keep themselves free with the current. Water velocity was high, low and medium but it did not create any barrier for fishes. Mixed fishes moved with the water current and also moved against the water current. It can be said that fish size can be a barrier when fishes are alone, but when they are in group they can pass barrier without less straggle. Their speed were cruising and sustained. Survival of fishes increased with the size of the group of migrating fishes.


The primary objective of a fishway is to provide suitable swimming paths for fish, with the aim of facilitating their migration. Therefore, it is crucial to identify movement zones that are energetically favorable for fish migration [70,73,74]. However, due to the absence of physiological experiments, the integration of physiological indices to better understand the interaction between fish behavior and hydraulic metrics remains an area for future research. It should be noted that the energy expenditure of fish in these studies may be conservative, and the conclusion s drawn may not directly correspond to real-life fish passage scenarios [76,80]. Nevertheless, this approach can still be valuable in the operation and management of fish passage systems, including those implemented in hydropower reservoirs and other fish bypass structures. By considering the energetic demands of fish during migration, these findings can inform decisions related to the design and optimization of fish passage facilities, enhancing their effectiveness in facilitating fish movement and conservation.

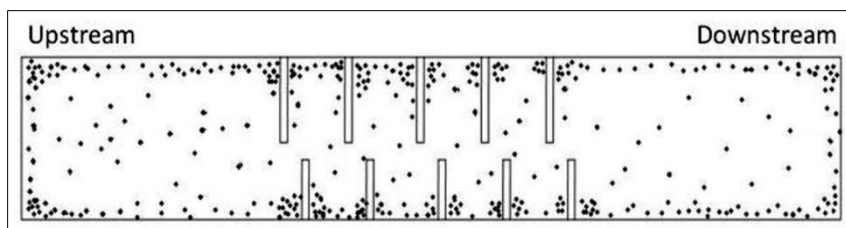

**Fig. 10. Fish movement and resting patten in the pools for different velocity and turbulence condition**

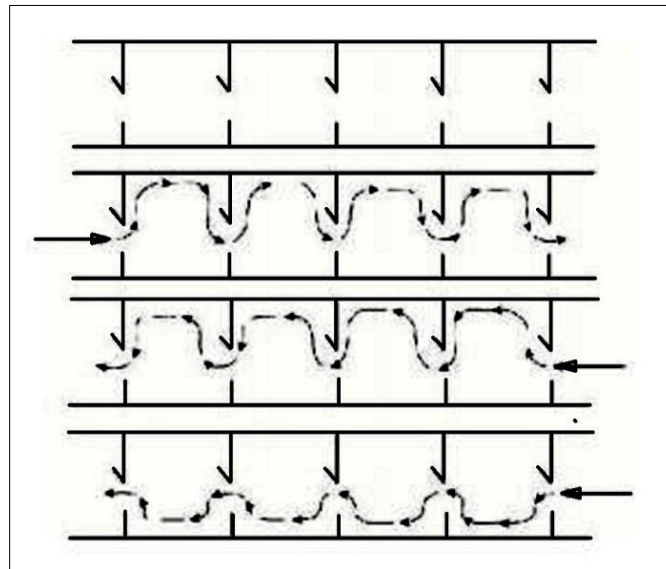

**Fig. 11. Path of fishes in individual movement to cross the fish pass**

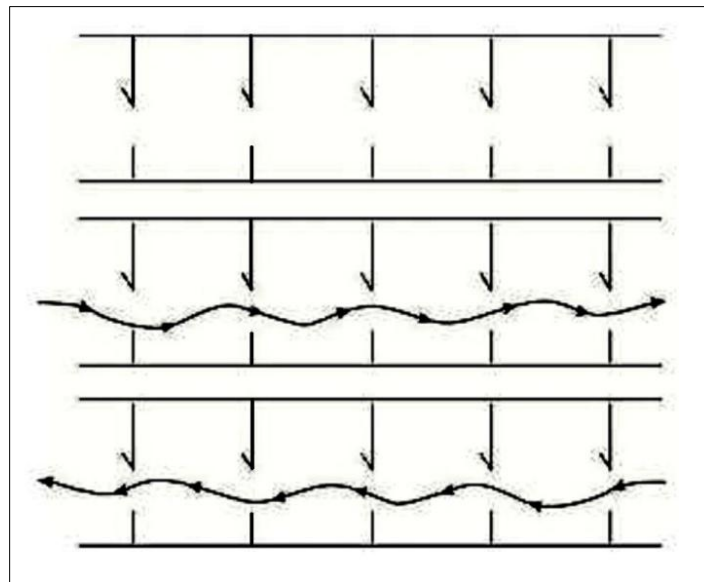

**Fig. 12. Path of fishes in group movement to cross the fish pass**

## 5. CONCLUSION

The growth rate of the jet in the pool is greater than that of a plane turbulent jet and the jet grows wider at planes close to the bed of the fishpass. Fish movement and resting pattern in the pools for different turbulence condition, it can be said fishes have avoided high turbulent kinetic energy area (red) in the contour map. The comparison shows the area with low turbulent kinetic energy (blue) was most suitable for fishes to pass the pools or taking rest inside the pools.

The results published in this article also provide helpful information about the eddy length scales and distribution within the jet and recalculating flow regions. These findings are important for understanding the potential effects of fish passage flow structure and would be useful to fish biologists and fishway developers.

## COMPETING INTERESTS

Author has declared that no competing interests exist.

## REFERENCES

1. Aguero M. Inland water fisheries in Bangladesh: management option and national interventions. Dhaka, Bangladesh: Department of Fisheries. 1989;1-13.
2. Albayrak I, Boes RM. Fish guidance structure with Wide Bar spacing: Mechanical behavioural barrier. In: Rutschmann P, Kampa E, Wolter C, Albayrak I, David L, Stoltz U, Schletterer M, editors. Novel developments for sustainable hydropower. Cham, Switzerland: Springer. 2022;99-104.
3. Ali MY. Open water fisheries and environmental changes in environmental aspects of surface water system of Bangladesh University publishers limited. Dhaka, Bangladesh. 1990;149.
4. Ali MY. Towards sustainable development: Fisheries resources of Bangladesh and strategy of Bangladesh, International Union for Conservation of Nature-The World Conservation Union and Bangladesh Agricultural Research Council, Dhaka, Bangladesh. 1991;149.
5. Andersson, Bengt. Computational fluid dynamics for engineers. Cambridge: Cambridge University Press. 2012;83.
6. Andrew FJ. The use of vertical-slot fishpasses in British Columbia, Canada. Proceedings of the international symposium on fishpasses, Gifu, Japan. 1990;267-74.
7. Bajestan MS, Kurdistani SM. Experimental investigation of hydraulic criteria in the fish ways, CSCE/EWRI of ASCE environmental engineering conference Niagara; 2002.
8. Barton AF, Keller RJ, Katopodis C. A free surface model of a verticalslot fishway to numerically predict velocity and turbulence distributions. Am Fish Soc Symp. 2008;39-52.
9. Beck C, Albayrak I, Meister J, Boes RM. Hydraulic performance of fish guidance structures with curved bars: Part 1: Head loss assessment. J Hydraul Res. 2020;58(5):807-18.
10. Behlke CE, Kane DL, McLean RF, Travis MD. Fundamentals of culvert design for passage of weak-swimming fish. Fairbanks, AK: State of Alaska, Department of Transportation and Public Facilities, Report No. FHWA-AK-RD-90-10. 1991;159.
11. Bell MC. Fisheries handbook of engineering requirements and biological criteria. North Pacific Division, Portland, Ore: United States Army Corps of Engineers; 1973.
12. Biswas RK. Study of the operational management of sariakandi fishpass [M.Sc. thesis], Water Resource Engineering, BUET; 2017.
13. Boiten W. Hydraulic design of the pool-type fishway with V-shaped overfalls. In: Proceedings of the international symposium on fishpasses, Gifu, Japan. 1990;483-90.
14. Boiten W. Flow measurement structures. Flow Meas Instrum. 2002;13(5-6):203-7.
15. Calluad D, Pineau G, Texier A, David L. Modification of vertical slot fishway flow with a supplementary cylinder. J Hydraul Res. 2014;52(5):614-29.
16. CEGIS. Floodplain fish habitat study: environment and GIS support project for water resources planning. Dhaka; 1997.
17. Chow VT. Open channel hydraulics. New York: McGraw-Hill Book Co. Inc; 1973.
18. Clay CH. Design of fishpasses and other fish facilities. Ottawa: Department of Fisheries of Canada; 1995.
19. Collins NH, Gillis GF. Upstream Fish Passage: Canadian Electrical Association. Montreal, Que; 1985.
20. Cooke S, Crossin GT, Hinch SG. Pacific salmon migration: completing the cycle. Encyclopedia of Fish Physiology: From Genome to Environment. 2011;3: 1945-52.
21. Cowx IG, Welcomme RL. Rehabilitation of rivers for fish. Oxford: Fishing News Books; 1998.
22. Dane BG. A review and resolution of fish passage problems at culvert sites in British Columbia, Can. fish. Mar. Serv [tech report]. 1978;126.
23. DDS. Draft development strategy (DSS): Main report. Halcrow/Mott MacDonald, Water Resource Planning Organization (W ARPO). Ministry of Water Resources. Dhaka, Bangladesh. 2000. Annexes A-G.
24. Ead SA, Katopodis C, Sikora GJ, Rajaratnam N. Flow regimes and structure in pool and fishpasses. J Environ Eng Sci. 2004;3(5):379-90.
25. Enders EC, Gessel MH, Anderson JJ, Williams JG. Effects of decelerating and accelerating flows on juvenile salmonid behavior. Trans Am Fish Soc. 2012; 141(2):357-64.

26. Falkovich G, Sreenivasan KR. Lessons from hydrodynamic turbulence. *Phys Today*. 2006;59(4):43-9.
27. FAP-17. Fisheries Studies and Pilot Project [final report] [draft], Main Volume; 1994.
28. FAP-19. Satellite-based radar for flood monitoring in Bangladesh. Dhaka: FAP. 1995;19.
29. FAP-20. Compartmentalization pilot project; fisheries and Aquaculture, FPCO/ Euroconsult and assoc., Min. Irrig., water dev. Dhaka, Bangladesh: And Flood Control; 1993.
30. FAP-20. Compartmentalization pilot project (CPP – FAP 20), Hatchling migration study, WARPO/ Euroconsult and assoc., Min. of water Resources. Dhaka, Bangladesh; 1998.
31. FAP-6. Fisheries specialist study, draft final. Northeast Regional Water Management Project. 1993;6.
32. FAP-6. Fisheries specialist study, Volume 1. Main report. Northeast regional water management project, report submitted to Government of Bangladesh; 1994.
33. FAP-6. Fishpass pilot project completion report, main Volume; 1998.
34. Fleming DF, Reynolds JB. Effects of spawning-run delay on spawning migration of Arctic grayling. *Am Fish Soc Symp* 10. 1991;299-305.
35. Garg SK. *Irrigation Engineering and hydraulic Structures* Delhi. Khanna Publishers. 2008;530.
36. Guiny E, Ervine DA, Armstrong JD. Hydraulic and biological aspects of fish passes for Atlantic salmon. *J Hydraul Eng*. 2005;131(7):542-53.
37. Guiny E, Ervine DA, Armstrong JD. Hydraulic and biological aspects of fish passes for Atlantic salmon. *J Hydraul Eng*. 2005;131(7):542-53.
38. Habiba U, Shaw R. 'Drought Scenario in Bangladesh', water insecurity: A social dilemma (community, environment and disaster risk management, vol. 13). Emerald Group Publishing Limited. 2004;213-45.
39. Hassan A. Development of design criteria of the water regulatory structure for floodplain fisheries management in Jamalpur Area [M.Sc. thesis], Department of Water Resources Engineering, BUET; 2002.
40. IUCN. Fish Pass and Fish Friendly Regulatory Study, Draft Final report, 4th Fisheries Project. Department of Fisheries, Government of the People's Republic of Bangladesh; 2002.
41. Kieffer JD, Colgan PW. The role of learning in fish behaviour. *Rev Fish Biol Fisheries*. 1992;2(2):125-43.
42. Jordan MC, Carlson RF. Design of depressed invert culverts. Fairbanks, AK: State of Alaska, Department of Transportation and Public Facilities, Report No. FHWA-AK-RD-87-23. 1987;64.
43. Kamula R. Flow over Weirs with Application to Fish Passage facilities. Oulu, Finland: Department of Process and Environmental Engineering, University of Oulu; 2001.
44. Kalopodis C. Review of culvert fish passage methods for freshwater species. In: Proceedings of the resource roads workshop. Ottawa: Environmental Protection Service, Environment Canada; 1981;202-20.
45. Katopodis C. Design of culverts for Fish Passage. In: Proceedings of the 3rd national Hydrotechnical conference, Que, Canada. 1977;949-71.
46. Katopodis C. Considerations in the design of fishpasses for freshwater species. In: Proceedings of the 3 Can Hydro technical Conference. 1981;857-78.
47. Katopodis C. Introduction to fishway design, Dept. of Fisheries and Oceans, Freshwater Institute, Central and Arctic Region. Canada; 1990.
48. Katopodis C. Introduction to fishway design, dept. of fisheries and oceans, freshwater institute, Central and Arctic region. Canada; 1992.
49. Katopodis C, Rajaratnam N. A review and laboratory study of the hydraulics of denil fishpasses, Can. tech [rep]. *Fish Aquat. Sci [Chapter]*: viii. 1983;181.
50. Katopodis C, Rajaratnam N. Similarity of scale models of denil fishpasses, IAHR Symposium on Scale Effects in Modeling Hydraulic Structures. 1984;2.8-1-6.
51. Kraus NC, Lohrmann RA, Cabrera R. New acoustic meter for measuring 3D laboratory flows. *J Hydraul Eng*. 1994;3:406-12.
52. Kucukali S. An experimental investigation of flow resistance and turbulent flow in brush fish pass. *PI Civ. Eng. Water Manag*. 2019;172:241-56.
53. Kucukali S, Hassinger R. Flow and turbulence structure in a baffle-brush fish

- pass. *PI Civ. Eng. Water Manag.* 2018;171:6-17.
54. Kucukali S, Hassinger R. Flow and turbulence structure in a vertical slot–brush fish pass. In: *Recent trends in environmental hydraulics*. Berlin, Germany: Springer. 2020;137-46.
55. Kynard B, Horgan M, Pugh D, Henyey E, Parker T. Using juvenile sturgeons as a substitute for adults: A new way to develop fish passage for large fish. *Am Fish Soc Symp.* 2008;61:1-21.
56. Larinier M. Fish passage through culverts, rock weirs and estuarine obstructions. *Bull Fr Pêche Piscic.* 2002;364(364);Suppl: 119-34.
57. Liu M, Rajaratnam N, Zhu DZ. Mean flow and turbulence structure in vertical slot fishpasses. *J Hydraul Eng.* 2006;10:765-77.
58. Lohrmann RA, Cabrera R, Kraus NC. Acoustic- Doppler velocimeter (ADV) for laboratory use. In: ASCE, editor. *Proceedings of the symposium on fundamentals and advancements in hydraulic measurements and experimentation*, C.A. Pugh. 1994; 351-65.
59. Lucas MC, Frear PA. Effects of a flow-gauging weir on the migratory behavior of adult barbel, A riverine cyprinid. *J Fish Biol.* 1997;50(2):382-96.
60. Marriner BA, Baki ABM, Zhu DZ, Thiem JD, Cooke SJ, Katopodis, C. Field and numerical assessment of turning pool hydraulics in a vertical slot fishway. *J Ecol Eng G Model Art.* 2003;2806:1-14.
61. Minkin SF. Flood control and nutritional consequences of biodiversity of fisheries, FAP-16 (environmental study). Dhaka: ISPAN. 1989;76.
62. Mishra AA, Girimaji SS; Girimaji and Sharath. Intercomponent energy transfer in incompressible homogeneous turbulence: multi-point physics and amenability to one-point closures. *J Fluid Mech.* 2013;731:639-81.
63. Nicola GG, Elvira B, Almodovar A. Dams and fish passage facilities in the large rivers of Spain: effects on migratory species. *Arch Hydrobiol.* 1996;10(1-4): 375-9.
64. NWMP. National water management plan, Water Resources Planning Organization. *Minist Water Resour Gov People’s Repub Bangladesh Main*; 2001.
65. Pavlov DS. The opomotor reaction and peculiarities of fish orientation in a water flow. Moscow: Nauka. 1970;148.
66. Pavlov DS. The Biological bases of fish behaviour control in a water flow. Moscow: Nauka. 1979;319.
67. Pavlov DS. Structures assisting the migration of non-salmonid fish: USSR, *FAO Tech. Bull.* 1989;308.
68. Pavlov DS, Skorobogatov MA, Shtaf LG. The influence of turbulent flow on the critical velocity of fish. *Doki. Akad Nauk SSSR.* 1982;267(4):1019-21.
69. Poulet N. Impact of weirs on fish communities in a piedmont stream, *River Resource and Application* 23. 2007; 1038-47.
70. Puertas J, Pena L, Teijeiro T. Experimental approach to the hydraulics of vertical slot fishpasses. *J Hydraul Eng.* 2004;130(1):10-23.
71. Puzdrowska M, Heese T. Turbulent kinetic energy in fish passes of various types of construction. *WIT Trans Ecol Environ.* 2019;234:81-90.
72. Quaranta E, Katopodis C, Revelli R, Comoglio C. Turbulent flow field comparison and related suitability for fish passage of a standard and a simplified low-gradient vertical slot fishway. *River Res Appl.* 2017;33(8):1295-305.
73. Quaresma AL, Romão F, Branco P, Ferreira MT, Pinheiro AN. Multi slot versus single slot pool-type fishways: A modelling approach to compare hydrodynamics. *Ecol Eng.* 2018;122:197-206.
74. Rahman AKA, *Freshwater Fishes of Bangladesh*, Zoological Society of Bangladesh, Department of Zoology, University of Dhaka. Dhaka. 1989;364.
75. Rahman MR. An experimental study on flow behavior for selected fish species in a vertical slot fish pass. [M.Sc. thesis], *Water Resource Engineering, BUET*; 2015.
76. Rajaratnam N, Katopodis C. Hydraulics of Sleep pass Fishpasses. *Can J Civ Eng.* 1991;18(6):1024-32.
77. Rajaratnam N, Katopodis C, Solanki S. New design for vertical slot fishpasses. *Can J Civ Eng.* 1992;19(3):402-14.
78. Rajaratnam N, Vinne GVD, Katopodis C. Hydraulics of vertical slot fishpasses. *J Hydraul Eng.* 1986;112:909-27.
79. Santos JM, Branco P, Katopodis C, Ferreira T, Pinheiro A. Retrofitting pool-and-weir fishways to improve passage performance of benthic fishes: effect of

- boulder density and fishway discharge. *Ecol Eng.* 2014;73:335-44.
80. Sato R. The actual design of fishpasses at rivers of Japan. In: Proceedings of the international symposium on fishpasses '90 in Gifu Japan; October 8-10. 1990;11-7.
81. Silva S, Lowry M, Macaya-Solis C, Byatt B, Lucas MC. Can navigation locks be used to help migratory fishes with poor swimming performance pass tidal barrages? A test with lampreys. *Ecol Eng.* 2017;102:291-302.
82. SonTek. Acoustic dopplerverlocimeter technical documentation. Version 4.0. San Diego; 1997.
83. SonTek. Horizon ADV user guide. San Diego; 2007.
84. Tarrade L, Pineau G, Callaud D. Detailed experimental study of hydrodynamic turbulent flows generated in vertical slot fishpasses. *Environ Fluid Mech.* 2001;11:1-21.
85. Theim JD, Binder TR, Dumont P. Multi species Fish Passage Behaviour in a Vertical Slot Fishway on the Richelieu River, Quebec, CANADA. *River Res Appl*; 2012.
86. Tunbridge BR. Environmental flows and fish populations of waters in the south-western region of Victoria. Victoria, Australia: Department of Conservation, Forests and Lands, Arthur Rylah Institute for Environmental Research technical report No. 65; 1998.
87. Wahl TL. Analyzing data using WinADV. Joint Conference on Water Resources Planning and Management. Minneapolis: American Society of Civil Engineering. 2000;10.
88. Wang H, Chanson H. How a better understanding of Fish-Hydrodynamics Interactions might enhance upstream fish passage in culverts. Civil engineering research report. 2017;CE162:1-43.
89. Water WARPO, Resources Planning Organization (WARPO): Draft report on Fish Migration Routes of the North-East Region. Dhaka: Ministry of Water Resources; 2000.
90. Welcomme RL, River Fishes FAO. *Fish. Tech Bull Pap.* 1985;262:330.
91. White LJ, Harris JH, Keller RJ. Movement of three non-salmonid fish species through a low-gradient vertical-slot fishway. *River Res Applic.* 2011;27(4):499-510.
92. Wilcox DC. Formulation of the k-omega Turbulence Model Revisited. *AIAA J.* 2008;46(11):2823-38.
93. Wu S, Rajaratnam N, Katopodis C. Structure of flow in vertical slot fishpasses, hydraulics of vertical slot fishpasses. *J Hydraul Eng.* 1999;125(4):351-60.
94. Yagci O. Hydraulic aspects of pool-weir fishpasses as ecologically friendly water structure. *Ecol Eng.* 2010;36(1):36-46.

© 2023 Sirajee; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

*Peer-review history:*

*The peer review history for this paper can be accessed here:*

<https://www.sdiarticle5.com/review-history/101330>